

ACTIVATED TITANIUM MMO ANODES

TUBULAR ANODES



| Anode Ref. | Diameter (mm) | Length (mm) | Output (A) | Anode surface (m ²) | Lifetime (years) |
|---------------|---------------|-------------|------------|---------------------------------|------------------|
| ATMMO 25/1000 | 25 | 1000 | 8 | 0,08 | 20 |
| ATMMO 25/500 | 25 | 500 | 4 | 0,04 | 20 |

Standard coating: 100 A/m²

All kinds of anodes can be delivered upon request with:

- XLPE/PVC or Kynar HMWPE cable
- In canister with carbonaceous backfill
- As anode strings

Please indicate your application:

- Soil
- Fresh water
- Brackish water
- Sea water



Anode characteristics:

| Environnement | Current density | Lifetime (years) |
|---|--------------------------|------------------|
| Soil | 50 A/m ² | 20 |
| With carbonaceous backfill type Loresco SC2 | 100 A/m ² | 20 |
| Fresh water | 100 A/m ² | 20 |
| Brackish water | 100-250 A/m ² | 20 |
| Sea water | 580 A/m ² | 20 |

Other types of MMO anodes available:

- Strip anodes - application: soil
- Wire anodes - application: fluids / concrete / soil
- Mesh anodes - application: concrete / electro osmosis

anotec

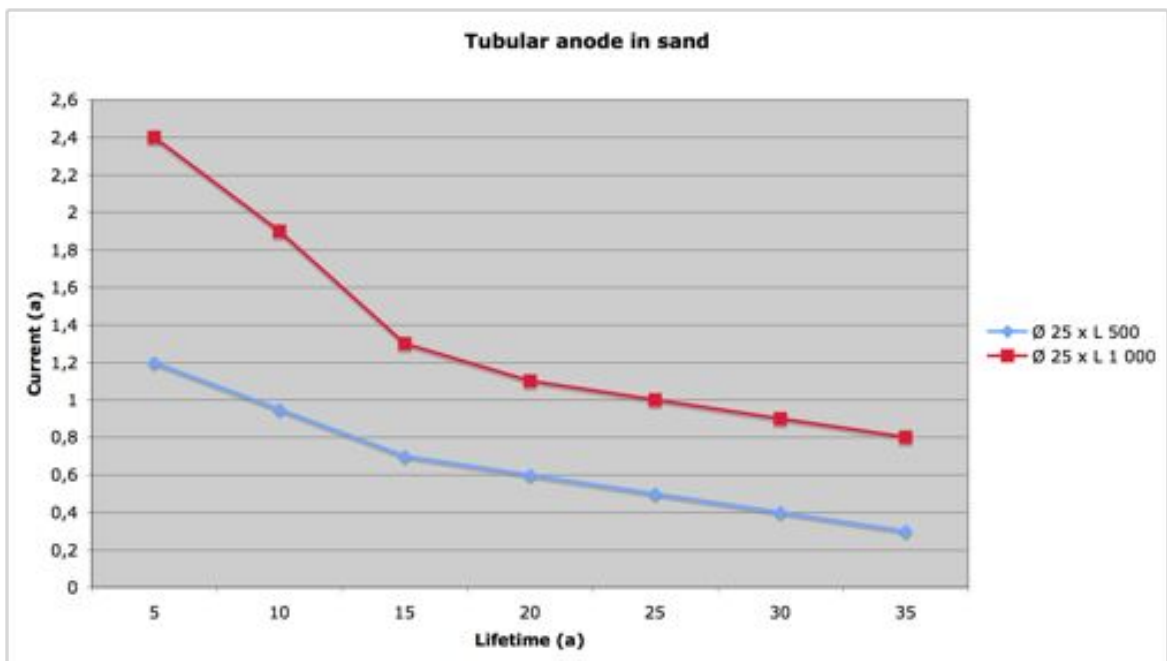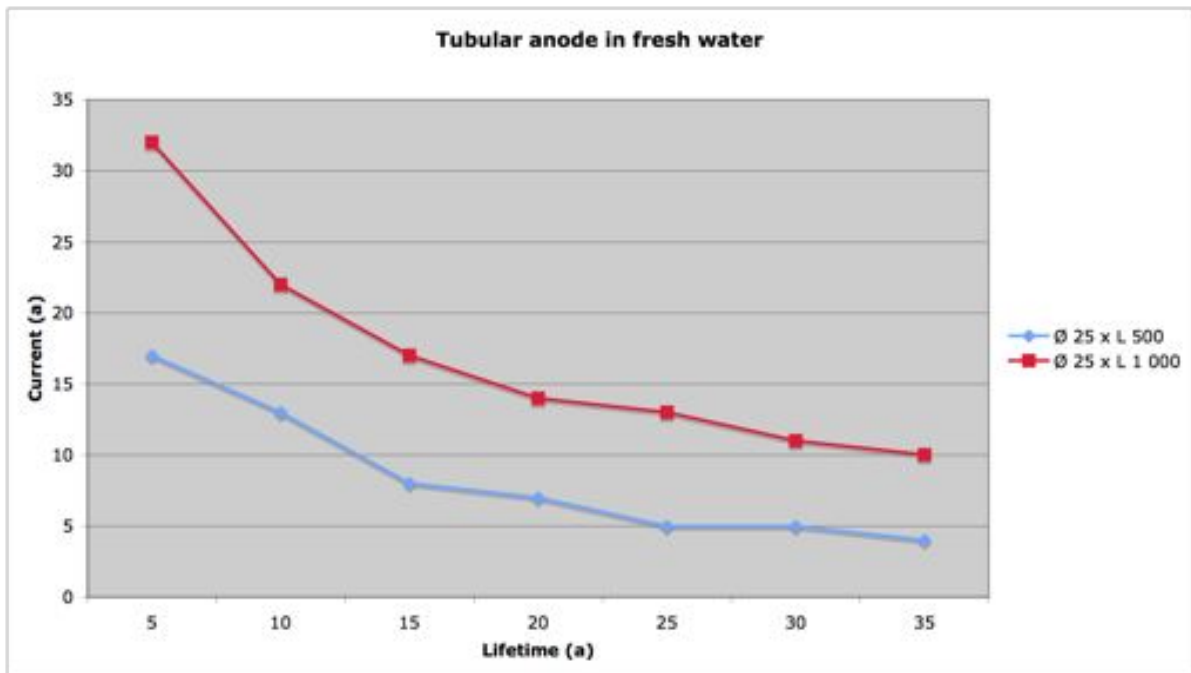

anotec

